



Fitting Instructions

HY66U
TOWBAR With -
For HYUNDAI i30 3022 Neck
2017 - Series

MATERIALS:

A	1	Crossbar
W	4	M10 x 40 x 1.25mm Bolts, Lock Washers and Flat Washers
X	2	Existing Plastic Fixing
Y	6	Cable Ties
ZE	1	Electrical Plate
ZN	1	Chosen Neck Option


This towbar must be used with either a Witter Towball (part number Z11) or Class A50-1 or A50-X towball dimensionally conforming to A50-1 with a 'D' and 'S' value greater than or equal to that of the towbar.

FITTING:

1. Refer to the owner's manual and remove the rear light clusters. Unclip the wiring attached, taking care not to drop the connection into the vehicle body. Remove the plastic fixing that is revealed once the cluster is removed.
2. Remove 4 screws from within each wheel arch and 3 plastic fixings (each side) that attach corner under trays to the bumper.
3. Remove 4 bolts (2 each side) that attach the bumper beam to the rear panel.
4. Starting at the bumper tips, carefully peel the bumper away from the vehicle body. Once the bumper is free from the body, it can, along with the bumper beam, slide from the rear panel. Unclip any wiring attaching the bumper and beam to the vehicle.
5. Remove the crash beam from the bumper by removing plastic fixings, screws and all wiring. Retain two plastic fixings (Y) that attached the crash beam to the bumper for later use. Return the crash beam to the vehicle owner.
6. Removing the exhaust from it's rubbers may help provide better access to the mounting points. Remove any tape covering the mounting points, ensuring the chassis holes and mating surfaces are fully clear of any mastic compound and extrusions.
7. Loosely attach Crossbar (A) to the outer face of the chassis using fixings (W).
8. Loosely attach the chosen neck option (ZN) and electrical plate (ZE).
9. Ensure bar is correctly aligned before fully tightening all fixings to their correct torque setting.
10. Re-attach exhaust to the bumper if removed from rubbers.
11. Cut the bumper using the diagrams below as a guide. Note: Larger cut shown is required when the retractable electric bracket (ZE) is used. Re-attach any wiring plugs removed and re-fit the bumper. Use two of the plastic fixings (Y) previously removed to attach the bumper to the Crossbar (A).
12. Secure the wiring, previously attached to the bumper beam to Crossbar (A) using the Cable Ties (Y) provided.

Please refer to the vehicle specification for the trailer weight and nose limits, which **must be observed**.

Recommended torque settings: Grade 8.8 bolts: M10 - 55 Nm, M12 - 95Nm

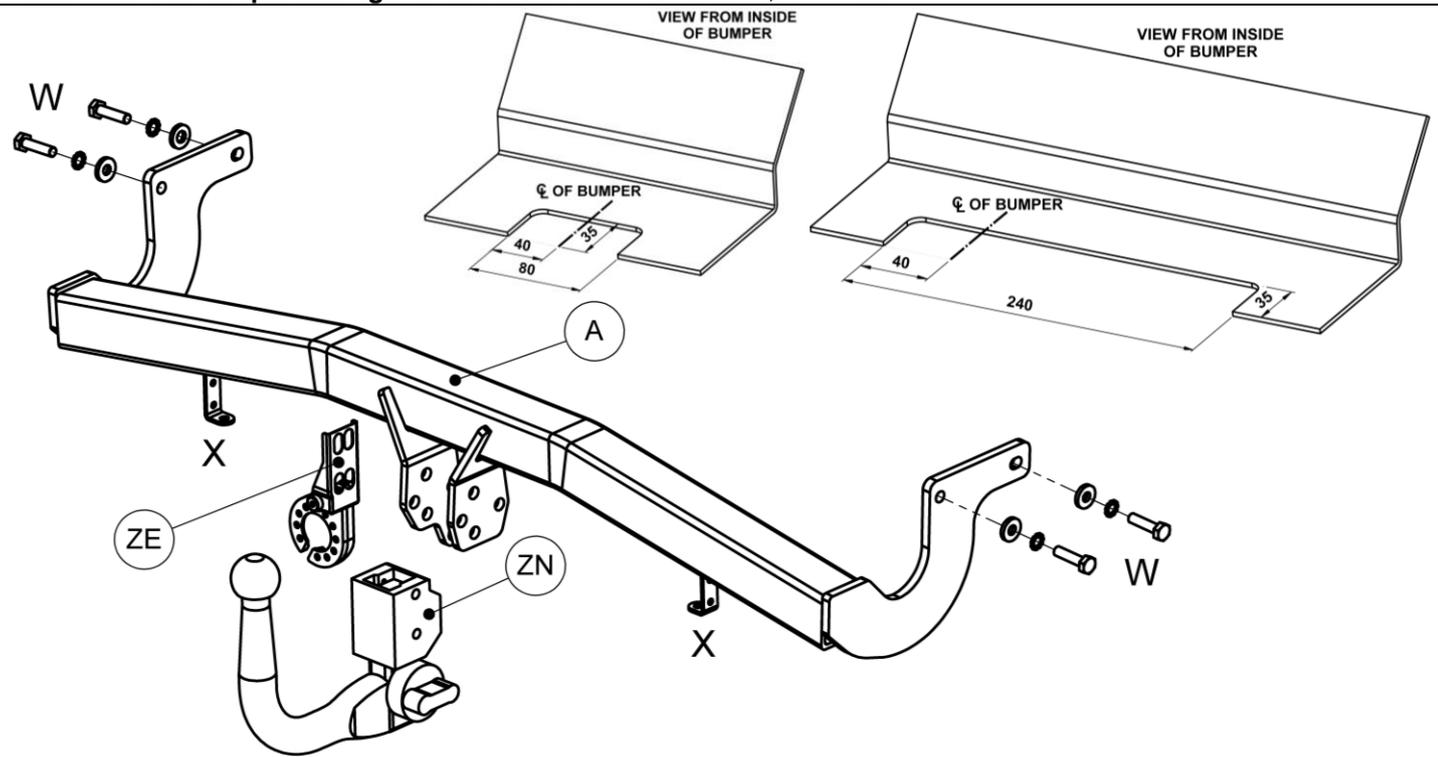

W 0001HY66U-FIT\$011509110000